


技术参数


Type	Value
Operating Wavelength (nm)	1310 or 1550
Bandwidth (nm)	± 40
Typ. Insertion Loss (at 23°C)	≤ 0.4
Max. Insertion Loss (at 23°C)	≤ 0.6
Extinction Ratio (at 23°C) (dB)	≥ 22
Return Loss (dB)	≥ 50
Fiber Type	Panda fiber
Package Dimension (mm)	$\varnothing 5.5 \times L38$
Maximum Power Handling (mW)	≤ 300
Operating Temperature (°C)	-0 to +70
Storage Temperature (°C)	-40 ~ +85

*Above specifications are for devices without the connectors.

*For device with connector, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB lower. The default connector key is aligned to slow axis.



产品尺寸

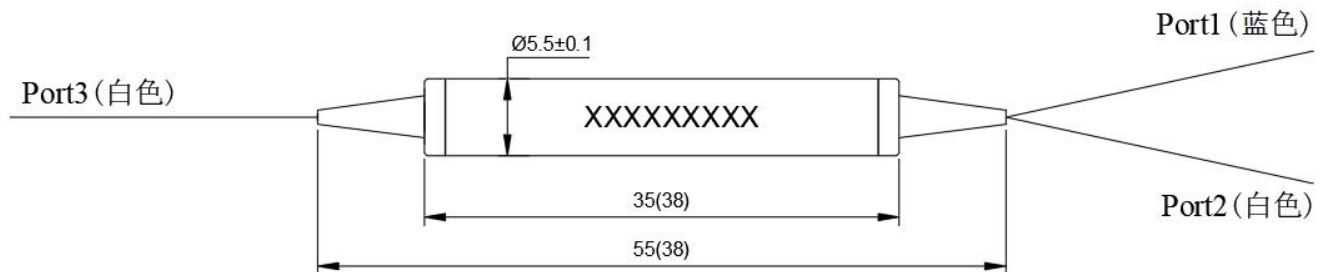

订购信息 HC-PMIS-A-B-C-D-E

	A	B	C	D	E
PMIS	Wavelength	Axis Alignment	Pigtail Type	Length	Connector
	1310=1310nm	F=Fast Axis Blocked	1=250um	H=0.5m	0=None
	1550=1550nm	B=Both Axis Working	2=900um loose tube	8=0.8m	1=FC/UPC
			3=3mm loose tube	1=1.0m	2=FC/APC
				5=1.5m	3=SC/APC
				2=2m	4=SC/UPC
					5=LC/PC