



Feature

- Compact structure
- Low IL
- Fast switch time




Application

- PON Network
- Protection
- Instrumentation
- Network monitor

Specifications

Parameters	Unit	HC-OSW-2×2B	
Operating Wavelength	nm	SM:1260~1620	MM:850±40
Test Wavelength	nm	1310 / 1550	850
Insertion Loss	dB	≤0.8 (typical :0.6)	
Wavelength Dependent Loss	dB	≤0.25	
Temperature Dependent Loss	dB	≤0.2	
Polarization Dependent Loss	dB	≤0.05	
Return Loss	dB	SM≥50 , MM≥30	
Crosstalk	dB	SM≥55 , MM≥35	
Repeatability	dB	≤±0.02	
Swtich Time	ms	≤8	
Durability	times	≥10 million	
Operating Voltage	V	3.0 or 5.0	
Optical Power	mw	≤500	
Operating Temperature	℃	-5~+70	
Storage Temperature	℃	-40~+85	
Operating Humidity	RH%	5~95	
Dimension	mm	L27xW12xH8.2	
Note:1.Within operating temperature and all SOP.			
2.Excluding connector, and add 0.2dB IL for each connector.			




Pin Configurations

Type	State	Optical	Electric Drive				State Sensor			
2x2B			Pin 1	Pin 5	Pin 6	Pin 10	Pin 2-3	Pin 3-4	Pin 7-8	Pin 8-9
Latching	A	P1-P4	-	-	GND	V+	Close	Open	Open	Close
	B	P1-P3	V+	GND	-	-	Open	Close	Close	Open
		P2-P4								
Non-latching	A	P1-P4	-	-	-	-	Close	Open	Open	Close
	B	P1-P3	-	-	-	GND	Open	Close	Close	Open
		P2-P4								

Electrical Specification


Type	Voltage	Current	Resistance
5V Latching	4.5~5.5V	36~44mA	125Ω
5V Non-latching	4.5~5.5V	26~32mA	175Ω
3V Latching	2.7~3.3V	54~66mA	50Ω
3V Non-latching	2.7~3.3V	39~47mA	70Ω

Optical Route

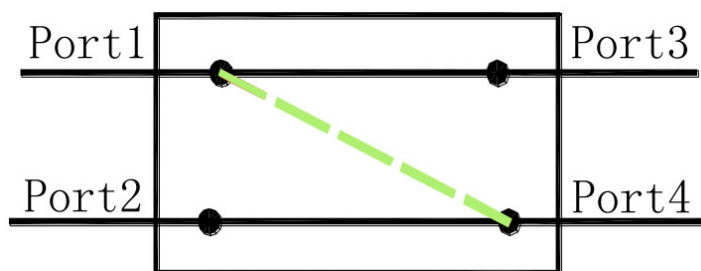



 **Dimension(mm)**

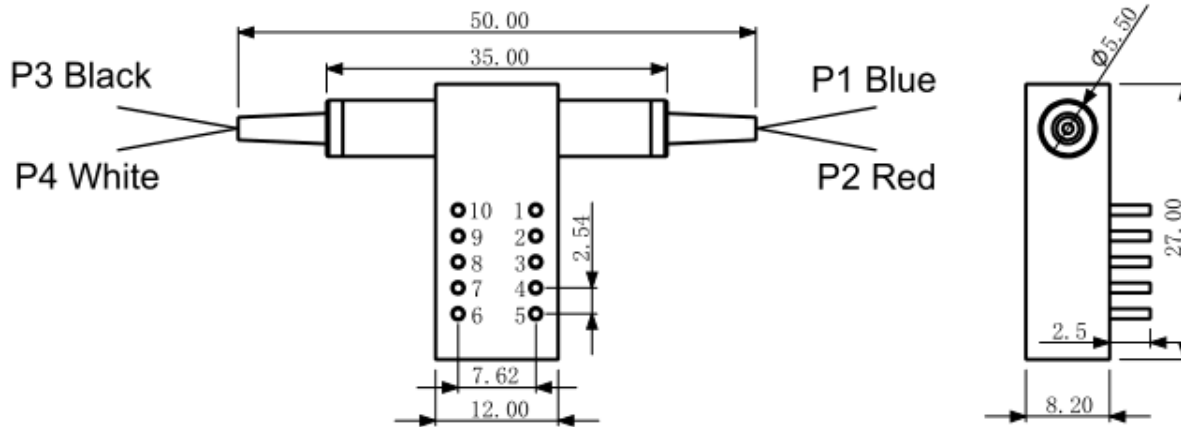

 **Ordering Information: HC - OSW-2×2B-A-B-C-D-E-F**

A	B	C	D	E	F
Test Wavelength	Type	Fiber Type	Fiber Dimension	Fiber Length	Connector
850: 850nm	3L: Latching	SM: Single Mode	025: $\Phi 0.25\text{mm}$	05: 0.5m	00: None
1310: 1310nm	3N: Non-latching	M1: Multi-mode 50/125	09: $\Phi 0.9\text{mm}$	10: 1.0m	FP: FC/UPC
1550: 1550nm	5L: Latching	M2: Multi-mode 62.5/125	X: other	15: 1.5m	FA: FC/APC
D: 1310/1550nm	5N: Non-latching	X: other		X: other	SP: SC/UPC
X: other					SA: SC/APC
					LP: LC/UPC
					LA: LC/APC
					X: other