



10/25Gb/s SFP28 850nm 100m Transceiver

HC-FL1R2x-1

Features

Up to 25Gb/s data links

850nm VCSEL laser and PIN receiver

Up to 100m on 50/125um MMF

Hot-pluggable SFP footprint

Support Digital Monitoring interface

Class 1 laser safety certified

Cost effective SFP28 solution, enables higher port densities and greater bandwidth

RoHS-10 compliant and lead-free

Single +3.3V power supply

2-wire interface for management specifications compliant with SFF 8472 digital diagnostic monitoring interface for optical transceivers

All-metal housing for superior EMI performance

Case operating temperature Commercial: 0 ~ +70°C Extended: -10 ~ +80°C Industrial: -40 ~ +85°C

Applications

High-speed storage area networks

Computer cluster cross-connect

Custom high-speed data pipes

Absolute Maximum Ratings

It has to be noted that the operation in excess of any individual absolute maximum ratings might cause permanent damage to this module.

Parameter	Symbol	Min	Max	Unit	Notes
Storage Temperature	T_s	-40	85	°C	
Power Supply Voltage	V_{CC}	-0.5	3.6	V	
Relative Humidity (non-condensation)	RH	5	95	%	
Damage Threshold	TH_d	3.4		dBm	

Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Operating Case Temperature	T_{OP}	0		70	°C	commercial
		-10		80		Extended
		-40		85		Industrial
Power Supply Voltage	V_{CC}	3.135	3.3	3.465	V	
Data Rate			25		Gb/s	
Control Input Voltage High		2		V_{CC}	V	
Control Input Voltage Low		0		0.8	V	
Link Distance (MMF)	D			100	m	50/125um

General Description

HC-FL1R2x 25Gb/s SFP28 transceiver consists of five sections: the LD driver, the limiting amplifier, the digital diagnostic monitor, the VCSEL laser and the PIN photo-detector. The module data link up to 100m in 50/125um multimode optical fiber.

The SFP28 SR module electrical interface is compliant to SFI electrical specifications. The transmitter input and receiver output impedance is 100 Ohms differential. Data lines are internally AC coupled. The module provides

differential termination and reduce differential to common mode conversion for quality signal termination and low EMI. SFI typically operates over 200 mm of improved FR4 material or up to about 150mm of standard FR4 with one connector.

The transmitter converts 25Gbit/s serial PECL or CML electrical data into serial optical data compliant with the 25GBASE-SR standard. An open collector compatible Transmit Disable

(Tx_Dis) is provided. Logic “1” or no connection on this pin will disable the laser from transmitting. Logic “0” on this pin provides normal operation. The transmitter has an internal automatic power control loop (APC) to ensure constant optical power output across supply voltage and temperature variations. An open collector compatible Transmit Fault (Tx_Fault) is provided. TX_Fault is module output contact that when high, indicates that the module transmitter has detected a fault condition related to laser operation or safety. The TX_Fault output contact is an open drain/collector and shall be pulled up to the Vcc_Host in the host with a resistor in the range 4.7-10 kΩ. TX_Disable is a module input contact. When TX_Disable is asserted high or left open, the SFP28 module transmitter output shall be turned off. This contact shall be pulled up to VccT with a 4.7 kΩ to 10 kΩ resistor

The receiver converts 25Gbit/s serial optical data into serial PECL/CML electrical data. An open collector compatible Loss of Signal is provided. Rx_LOS when high indicates an optical signal level below that specified in the relevant standard. The Rx_LOS contact is an open drain/collector output and shall be pulled up to Vcc_Host in the host with a resistor in the range 4.7-10 kΩ, or with an active termination. Power supply filtering is recommended for both the transmitter and receiver. The Rx_LOS signal is intended as a preliminary indication to the system in which the SFP28 is installed that the received signal strength is below the specified range. Such an indication typically points to non-installed cables, broken cables, or a disabled, failing or a powered off transmitter at the far end of the cable.

Pin Assignment and Pin Description

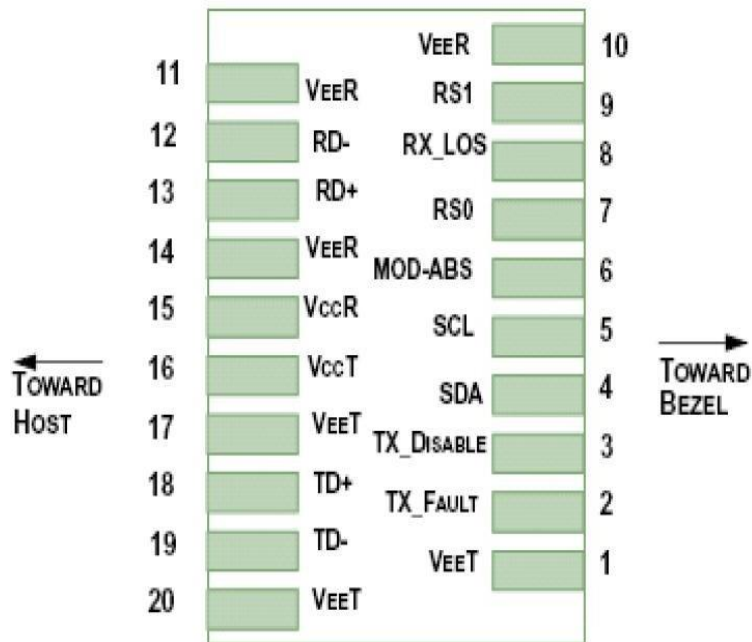


Figure1. Diagram of host board connector block pin numbers and names

PIN	Name	Name/Description	Notes
1	VeeT	Transmitter Ground	1
2	TX_Fault	Transmitter Fault	
3	TX_Disable	Transmitter Disable; Turns off transmitter laser output	
4	SDA	Two wire serial interface Data Line (LVCMOS-I/O) (MOD-DEF2)	2
5	SCL	Two wire serial interface Clock Line (LVCMOS-I/O) (MOD-DEF1)	2
6	MOD_ABS	Module Definition, Grounded in the module	
7	RS0	Rx Rate Select:	
8	RX_LOS	Receiver Loss of Signal Indication Active LOW	
9	RS1	Transmitter Rate Select (not used)	
10	VeeR	Receiver Ground	1
11	VeeR	Receiver Ground	1
12	RD-	Receiver Inverted Data Output	

13	RD+	Receiver Data Output	
14	VeeR	Receiver Ground	1
15	VccR	Receiver Power - +3.3V	
16	VccT	Transmitter Power - +3.3 V	
17	VeeT	Transmitter Ground	1
18	TD+	Transmitter Non-Inverted Data Input	
19	TD-	Transmitter Inverted Data Input	
20	VeeT	Transmitter Ground	1

Notes:

1. Module ground pins GND are isolated from the module case.
2. Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.45V on the host board.

Electrical Characteristics

The following electrical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

Parameter	Symbol	Min.	Typ.	Max	Unit	Notes
Power Consumption	p			1.0	W	
Supply Current	Icc			300	mA	
Transmitter						
Single-ended Input Voltage Tolerance	Vcc	-0.3		4.0	V	
common mode voltage tolerance		15			mV	
Differential Input Voltage Swing	Vin,pp	180		700	mVp p	
Differential Input Impedance	Zin	90	100	110	Ohm	1
Transmit Disable Assert Time				10	us	
Transmit Disable Voltage	Vdis	Vcc-1.3		Vcc	V	

Transmit Enable Voltage	Ven	Vee		Vee +0.8	V	2
Receiver						
Single-ended Input Voltage Tolerance	Vcc	-0.3		4.0	V	
Differential Output Voltage Swing	Vout,pp	300		900	mVp p	
Differential Output Impedance	Zout	90	100	110	Ohm	3
Data output rise/fall time	Tr/Tf	9.5			ps	4
LOS Assert Voltage	VlosH	Vcc-1.3		Vcc	V	5
LOS De-assert Voltage	VlosL	Vee		Vee +0.8	V	5

Notes:

1. Connected directly to TX data input pins. AC coupled thereafter.
2. Or open circuit.
3. Input 100 ohms differential termination.
4. These are unfiltered 20-80% values.
5. Loss of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

Optical Characteristics

The following optical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

Parameter	Symbol	Min.	Typical	Max	Unit	Notes
Transmitter						
Center Wavelength	λ_c	840	850	860	nm	
Optical Spectral Width	$\Delta\lambda$			0.6	nm	
Average Optical Power	P_{AVG}	-8.4		2.4	dBm	1
Optical Extinction Ratio	ER	2.0			dB	2

Transmitter OFF Output Power	Poff			-30	dBm	
Transmitter and Dispersion Penalty	TDP			4.4	dB	
Optical Return Loss Tolerance	ORLT			12	dB	
Transmitter Eye Mask	Compliant with IEEE802.3ae					
Receiver						
Center Wavelength	λ_c	840	850	860	nm	
Receiver Sensitivity in averagepower @10.3125Gbps	Sen.			-10	dBm	3
Receiver Sensitivity in averagepower @25.78125Gbps	Sen.			-10.3	dBm	4
Stressed Sensitivity (OMA)				-5.2	dBm	4
Input Saturation Power (OMA)	Psat	3			dBm	
LOS Assert	LOSA	-20			dBm	
LOS De-assert	LOSD			-11	dBm	
Optical Return Loss	ORL	12			dB	
LOS Hysteresis	LOSH	0.5			dB	

Notes:

1. Class 1 Laser Safety per FDA/CDRH and IEC-825-1 regulations.

ER>3dB @10.3125Gbps, ER>2dB @25.78125Gbps

3. Measured with Light source 850nm, ER=3.0dB; BER≤1E-12 @10.3125Gbps, PRBS=2³¹ -1 NRZ.

4. Measured with Light source 850nm, ER=2.0dB; BER≤5E-5 @25.78125Gbps, PRBS=2³¹ -1 NRZ.

Digital Diagnostic Functions

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF-8472 Rev10.2 with internal calibration mode. For external



Ordering Information

Part Number	Data Rate (Gb/s)	Wavelength (nm)	Transmission Distance(m)	Temperature (°C) (Operating Case)
HC -FL1R2C	10/25	850	100	0~70 commercial
HC -FL1R2E	10/25	850	100	-10~80 Extended
HC -FL1R2I	10/25	850	100	-40~85 Industrial